







中国认可 国际互认 检测 TESTING CNAS L4743

Test Report

No. AJFS2201000768FF

Date: FEB.09, 2022

Page 1 of 7

MASTERFLEX HOSES (KUNSHAN) CO. LTD.

NO.395 JIANDE RD, ZHANGPU TOWNSHIP, KUNSHAN, JIANGSU P.R.CHINA

Sample Description: MASTER-PUR M TRAINFLEX

Color: BLACK
Style/Item No.: /

The above sample(s) was / were submitted and identified on behalf of the client. SGS is not responsible for the authenticity, integrity and results of the data and information and / or the validity of the conclusion arising therefrom. Results apply to the sample as received.

Test Requested:

EN 45545-2:2013+A1:2015 Railway applications—Fire protection on railway vehicles Part 2: Requirements for fire behaviour of materials and components, and testing according to Table 5 — Material requirement sets (R22), (R23).

Test Results: -- See attached sheet --

Test Period:

Sample Receiving Date : JAN.26, 2022

Test Performing Date : JAN.26, 2022 TO FEB.08, 2022

Signed for and on behalf of SGS-CSTC Standards Technical Services Co., Ltd. Anji Branch

Allen Zou

Approved Signatory





No. AJFS2201000768FF

Date: FEB.09, 2022

Page 2 of 7

I. Description of Test specimens

Sample Description	Master-PUR M Trainflex (provided by client)					
Color	Black					
Exposed (test) surface	One surface					
	T01 EN ISO 4589-2: 150mm×10mm×1.0mm					
Size of specimens	T10.03 EN ISO 5659-2: 75mm×75mm×1.0mm					
	T12 NF X70-100-1&-2: 1, 1.0017g 2, 1.0000g 3, 1.0009g					

II. Summary of test results

Requirement set (used for)	Test method reference	Parameter Unit	Test results *	
	T01 EN ISO 4589-2: OI	Oxygen content %	28.3	
R22 (IN16; EL2; EL6A; EL7A; M2)	T10.03 EN ISO 5659-2: 25 kW/m ²	Ds max. dimensionless	124.7	
,	T12 NF X 70-100-1 and -2 600℃	CIT _{NLP} dimensionless	0.15	
R23 (EX12; EL2; EL5 EL6B; EL7B; M3)	T01 EN ISO 4589-2: OI	Oxygen content %	28.3	
	T10.03 EN ISO 5659-2: 25 kW/m ²	Ds max. dimensionless	124.7	
	T12 NF X 70-100-1 and -2 600℃	CIT _{NLP} dimensionless	0.15	

^{*} For the test details, please see the appendix of this test report.

III. Conclusion

According to the test results, the submitted sample **meets** the requirements of R22 and R23 (detailed in Table 5 of EN 45545-2:2013+A1:2015) for **HL2** Hazard Level Classification.

To be continued...



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sps.com/en/Terms-and-Conditions.appx and, for electronic format documents, subject to Terms and Conditions [Terms-and-Conditions [Terms-and-Con



No. AJFS2201000768FF

Date: FEB.09, 2022

Page 3 of 7

Test Criteria for EN 45545-2:2013+A1:2015 Table 5 Material requirement sets (R22), (R23)

Requirement set (used for)	Test method reference	Parameter Unit	Requirement Definition	HL1	HL2	HL3
	T01 EN ISO 4589-2: OI	Oxygen content %	Minimum	28	28	32
R22 (IN16; EL2; EL6A;	T10.03 EN ISO 5659-2: 25 kW/m ²	Ds max. dimensionless	Maximum	600	300	150
EL7A; M2)	T12 NF X 70-100-1 and -2 600℃	CIT _{NLP} dimensionless	Maximum	1.2	0.9	0.75
R23	T01 EN ISO 4589-2: OI	Oxygen content %	Minimum	28	28	32
(EX12; EL2; EL5 EL6B; EL7B;	T10.03 EN ISO 5659-2: 25 kW/m ²	Ds max. dimensionless	Maximum		600	300
M3)	T12 NF X 70-100-1 and -2 600℃	CIT _{NLP} dimensionless	Maximum		1.8	1.5

Statements:

This declaration of conformity is only based on the result of this laboratory activity, the impact of the uncertainty of the results was not included.

The test results relate to the behaviour of the test specimens of a product under the particular conditions of the test; they are not intended to be the sole criterion for assessing the potential fire hazard of the product in use. The test results relate only to the specimens of the product in the form in which were tested.

To be continued...



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sps.com/en/Terms-and-Conditions.appx and, for electronic format documents, subject to Terms and Conditions [Terms-and-Conditions [Terms-and-Con



No. AJFS2201000768FF

Date: FEB.09, 2022

Page 4 of 7

<u>APPENDIX 1: T01 EN ISO 4589-2:2017 Plastics —Determination of burning behaviour by oxygen Index --</u> <u>-Part 2: Ambient-temperature test</u>

1. Conditioning

T: 23±2°C, R.H: 50±5%, at least 88 h.

2. Test results

Type: III; Ignition method: Top surface ignition

a) Select initial oxygen concentration (in accordance with 8.2.3): 25%

b) Determining the Preliminary Oxygen Concentration (Till pair of oxygen concentrations which gives opposite response differs by ≤1%, in accordance with 8.6)

Oxygen concentration, % (V/V)	25	30	29	28	
Length burnt, (mm)	5	>50	>50	5	
Response, ("X" or "O")	0	Х	Х	0	

Oxygen concentration of the "O" response for the pair = $\frac{28.0}{\%}$ (this is the concentration to be used again for the first measurement in section below)

c) Determination of the oxygen index (in accordance with 8.7)

Step size to be used for successive changes d in oxygen concentration = 0.2% [Initially to be 0.2% (V/V), unless otherwise instructed]

Parameter	N⊤ series measurements										
	NL series measurements (8.7.1 and 8.7.2)					(According to the 8.7.3) cf					
Oxygen concentration, % (V/V)	28.0	28.0 28.2 28.4					28.4	28.2	28.4	28.2	28.4
Length burnt, (mm)	5	5	>50				>50	5	>50	5	>50
Response, ("X" or "O")	0	0	Х	\rightarrow	\rightarrow	\rightarrow	х	0	Х	0	Х
	Column (2, 3, 4 or 5): 3 Row (1 to 16): 6 k value from EN ISO 4589-2 table 4: -0.46										
	Hence k= -0.46										

 $OI = Cf + kd = 28.4 + (-0.46 \times 0.2)$

=28.3% (to one decimal place)

=28.30% (to two decimal places)

To be continued...



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printer overleaf, available on request or accessible at <a href="http://www.sps.com/en/Terms-and-Conditions, replacement of the company subject to Terms and Conditions for Electronic Documents at <a href="http://www.sps.com/en/Terms-and-Conditions, replacement aspx Attention is drawn to the limitation of liability, indemnification and jurisdiction issues define intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content on appearance of this document is unlawfull and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.



No. AJFS2201000768FF

Date: FEB.09, 2022

Page 5 of 7

<u>APPENDIX 2: T10.03 EN ISO 5659-2:2017 Plastics—Smoke generation — Part 2: Determination of optical density by a single- chamber test. Heat flux 25kw/m² with pilot flame, test duration is 10min.</u>

1. Conditioning

T: 23±2 °C, R.H: 50±5%, until the test sample was conditioned to constant mass.

2. Test Results

Parameters	1	2	3	Avg
Weight (g)	8.5	8.5	8.6	8.5
D _s (1.5)	55.9	51.9	61.9	56.6
D _{s (4)}	87.5	74.8	80.5	80.9
D _{s (10)}	156.7	111.6	104.7	124.3
VOF₄ min	213.5	194.4	215.8	207.9
D _{s max}	157.9	111.6	104.7	124.7
T (D _{s max}) s	580	600	600	1

Note:

D_{s (n)} is the specific optical density at nth min.

VOF₄ is the cumulative value of specific optical densities in the first 4 min of the test.

 $D_{s\,\text{max}}$ is the maximum optical density in the test chamber.

To be continued...



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sps.com/en/Terms-and-Conditions.appx and, for electronic Documents at http://www.sps.com/en/Terms-and-Conditions/Terms-en/Document as that this first the special conditions appx and, for electronic Document as that this first the special conditions for Electronic Document as that this first the special conditions of the special conditions of the special conditions appx and, for electronic Document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.



No. AJFS2201000768FF

Date: FEB.09, 2022

Page 6 of 7

APPENDIX 3: T12 NF X70-100-1:2006 Fire tests—Analysis of gaseous effluents—Part 1: Methods for analysing gases stemming from thermal degradation & NF X70-100-2:2006 Fire tests—Analysis of gaseous effluents—Part 2: Tubular furnace thermal degradation method. Furnace Temperature: 600°C, Toxic for non-listed products.

1. Conditioning

T: 23±2°C and R.H 50±5%, at least 48h and until the test sample was conditioned to constant mass.

2. Test results

Gas component [mg/g]	1	2	3	Avg	Reference concentration [mg/m³]
CO	88.53	85.69	89.00	87.74	1380
CO ₂	775.01	731.10	740.61	748.91	72000
HF	ND	ND	ND		25
HCI	ND	ND	ND		75
HBr	ND	ND	ND		99
HCN	1.89	2.34	2.25	2.16	55
NO, NO _X	1.35	1.39	1.36	1.37	38
SO ₂	0.64	0.85	0.64	0.71	262

Remark: ND indicates Non-detected.

Calculations of CIT_{NLP}

$$CIT_{NLP} = 1 \frac{g}{m^3} \sum_{i=1}^{i=8} \frac{Y_i}{C_i}$$

Y_i: is the yield of ith gas in mg/g in the NF X70-100-1 tube furnace;

C_i: is the reference concentration of the ith gas in mg/m³.

 $CIT_{NLP} = 0.15$

To be continued...



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.appx and, for electronic Documents at http://www.sgs.com/en/Terms-and-Conditions/Terms-a-Document.appx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawfull and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the résults shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.




No. AJFS2201000768FF

Date: FEB.09, 2022

Page 7 of 7

Photo Appendix:

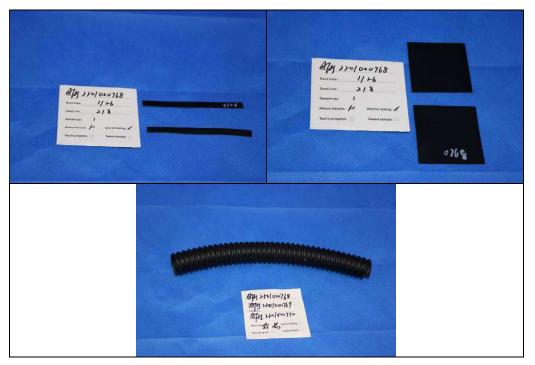

SGS authenticate the photo on original report only

End of Report



Attention:To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 830